



LED Panel/ 2x2/ 40W /100-277V/ 4000K



Product description: LED Panel 2x2, 40W 4000K 0-10 Dimming

Model Name: KK-PS-22DW-40-LARZ

Order SKU: 500812

◇ Features


- High efficiency and energy saving
- No UV, noise, or flickering;
- High shock and vibration resistance
- Eco-friendly, Mercury-free;
- wide lighting beam angle
- Embed/Suspension/ceiling-mount



◇ Specifications


Rated Voltage (V)	110-277V
Rated Wattage (W)	40W
Frequency (Hz)	50/60 Hz
Rated Input Current (mA)	750mA Max
Power Factor	>0.9
Luminous Flux (LM)	4,382.42LM
Color Temperature	Cool white 4000K
Color Rendering Index (Ra)	>80
Beam Angle	110D
Lamp Efficacy (LM/W)	105.84LM/W
Rated Lamp Lifetime (h)	50,000
Dimming	0-10V Dimming
Dimension (mm)	603*603*9
IP Rating	20
Operating Temperature	-20 to 45 degC
Driver	External
Certificate	UL, CUL, DLC, Rohs

4.3 ANSI Chromaticity Quadrangles Diagram

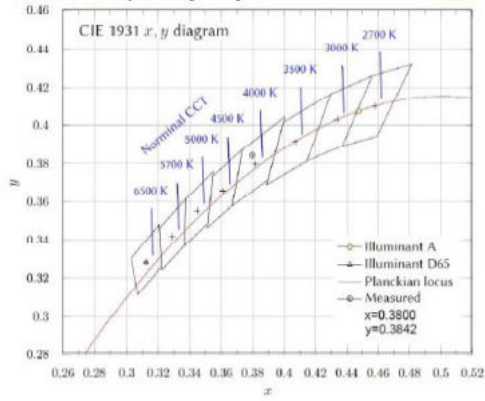

4.4 Color Rendering Details

R1	R2	R3	R4	R5
78	86	94	79	77
R6	R7	R8	R9	R10
81	86	63	1	68
R11	R12	R13	R14	R15
77	57	80	96	72

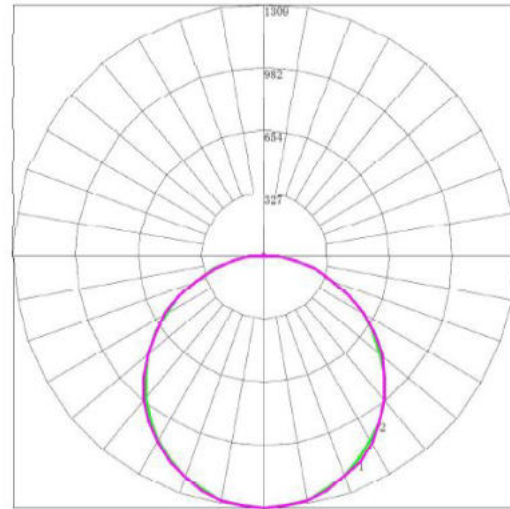

Maximum Candela = 1308.84 Located At Horizontal Angle = 0, Vertical Angle = 0
 # 1 - Vertical Plane Through Horizontal Angles (0 - 180)
 # 2 - Vertical Plane Through Horizontal Angles (90 - 270)