

# SLIMLED™

## Recessed Light

SUPER THIN LED TECHNOLOGY



**SLM4**  
4" × ½"  
9W / 120V  
500 LUMENS



**SLM6**  
6" × ½"  
12W / 120V  
700 LUMENS



**SLM4S**  
4" Square × ½"  
9W / 120V  
500 LUMENS



**SLM6S**  
6" Square × ½"  
12W / 120V  
700 LUMENS

The SLIMLED is a high performance, easy to install down light. No recessed housing required. One-half inch thick, it will fit almost anywhere. With its slim design, it's the perfect lighting solution when you have joists or duct work in the way. In addition, with 120 degree beam spread, the SLIMLED you no longer need to worry about dark shadows on the wall making this fixture a great solution for corridors and low ceiling applications. Airtight, rated for direct contact with insulation, this fixture is the perfect choice for most lighting applications, soffits, drop ceilings, all general lighting applications. Dimmable driver included.



Dimmable



Damp Location




120° Beam Angle



Colour Rendering Index



2700°K / 3000°K / 4000°K Colour Temperature

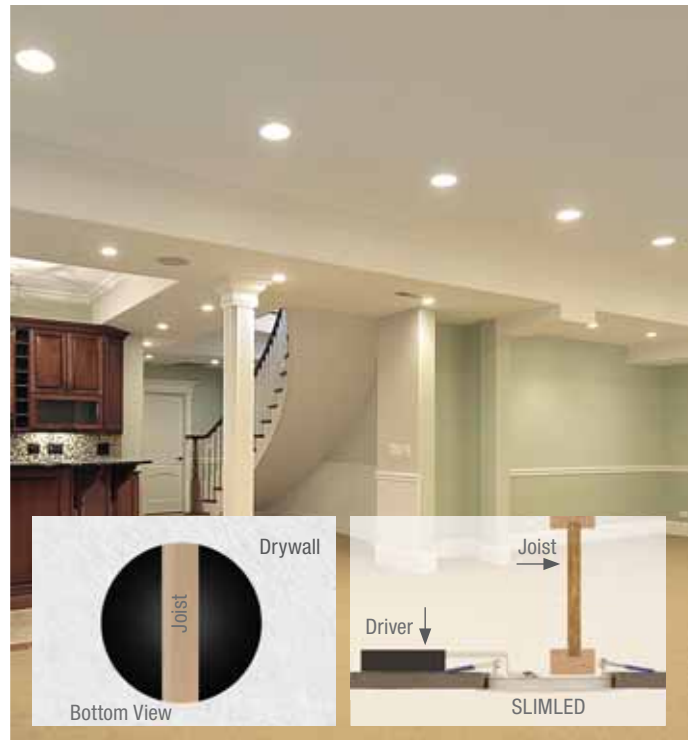

For more information on Lifetime Warranty program, please visit [www.liteline.com/goldlabel](http://www.liteline.com/goldlabel)



**LITELINE CORPORATION**

Info@liteline.com  
www.liteline.com



416-996-1856  
1-866-730-7704



905-794-1990  
1-888-738-9736

REV 1.21.16

© Copyright 2016, Liteline Corporation

# Ordering Guide

Part #	Description	UPC	Case Qty.	Master Qty.
--------	-------------	-----	-----------	-------------

## SlimLED™ Kits

### 4" Round Kit, 9W, 500 Lumens

SLM4-27-WH	4" SlimLED fixture and driver, Round, 9W, 120V, 2700°K, white	771250035721	12	48
SLM4-30-WH	4" SlimLED fixture and driver, Round, 9W, 120V, 3000°K, white	771250975348	12	48
SLM4-40-WH	4" SlimLED fixture and driver, Round, 9W, 120V, 4000°K, white	771250975355	12	48
SLM4-27-BN	4" SlimLED fixture and driver, Round, 9W, 120V, 2700°K, brushed nickel	771250035738	12	48
SLM4-30-BN	4" SlimLED fixture and driver, Round, 9W, 120V, 3000°K, brushed nickel	771250975362	12	48
SLM4-40-BN	4" SlimLED fixture and driver, Round, 9W, 120V, 4000°K, brushed nickel	771250975379	12	48
SLM4-27-BK	4" SlimLED fixture and driver, Round, 9W, 120V, 2700°K, black	771250035745	12	48
SLM4-30-BK	4" SlimLED fixture and driver, Round, 9W, 120V, 3000°K, black	771250977519	12	48
SLM4-40-BK	4" SlimLED fixture and driver, Round, 9W, 120V, 4000°K, black	771250977526	12	48

### 4" Square Kit, 9W, 500 Lumens

SLM4S-30-WH	4" SlimLED fixture and driver, Square, 9W, 120V, 3000°K, white	771250977533	12	48
SLM4S-40-WH	4" SlimLED fixture and driver, Square, 9W, 120V, 4000°K, white	771250977540	12	48
SLM4S-30-BN	4" SlimLED fixture and driver, Square, 9W, 120V, 3000°K, brushed nickel	771250977557	12	48
SLM4S-40-BN	4" SlimLED fixture and driver, Square, 9W, 120V, 4000°K, brushed nickel	771250977564	12	48
SLM4S-30-BK	4" SlimLED fixture and driver, Square, 9W, 120V, 3000°K, black	771250010254	12	48
SLM4S-40-BK	4" SlimLED fixture and driver, Square, 9W, 120V, 4000°K, black	771250010261	12	48

### 6" Round Kit, 12W, 700 Lumens

SLM6-30-WH	6" SlimLED fixture and driver, Round, 12W, 120V, 3000°K, white	771250975386	12	24
SLM6-40-WH	6" SlimLED fixture and driver, Round, 12W, 120V, 4000°K, white	771250975393	12	24
SLM6-30-BN	6" SlimLED fixture and driver, Round, 12W, 120V, 3000°K, brushed nickel	771250975409	12	24
SLM6-40-BN	6" SlimLED fixture and driver, Round, 12W, 120V, 4000°K, brushed nickel	771250975416	12	24
SLM6-30-BK	6" SlimLED fixture and driver, Round, 12W, 120V, 3000°K, black	771250010278	12	24
SLM6-40-BK	6" SlimLED fixture and driver, Round, 12W, 120V, 4000°K, black	771250010285	12	24

### 6" Square Kit, 12W, 700 Lumens

SLM6S-30-WH	6" SlimLED fixture and driver, Square, 12W, 120V, 3000°K, white	771250977571	12	24
SLM6S-40-WH	6" SlimLED fixture and driver, Square, 12W, 120V, 4000°K, white	771250977588	12	24
SLM6S-30-BN	6" SlimLED fixture and driver, Square, 12W, 120V, 3000°K, brushed nickel	771250977595	12	24
SLM6S-40-BN	6" SlimLED fixture and driver, Square, 12W, 120V, 4000°K, brushed nickel	771250977601	12	24
SLM6S-30-BK	6" SlimLED fixture and driver, Square, 12W, 120V, 3000°K, black	771250010315	12	24
SLM6S-40-BK	6" SlimLED fixture and driver, Square, 12W, 120V, 4000°K, black	771250010322	12	24



Part #	Description	UPC	Case Qty.	Master Qty.
<b>SlimLED™ (Sold Separately)</b>				
<b>4" Round (Fixture only), 9W, 500 Lumens</b>				
SLM4F-9W30K-BK	4" Round SlimLED (fixture only), 9W, 3000°K, black. Requires SLM-DVR-9W.	771250010230	12	48
SLM4F-9W30K-BN	4" Round SlimLED (fixture only), 9W, 3000°K, brushed nickel. Requires SLM-DVR-9W.	771250976017	12	48
SLM4F-9W30K-WH	4" Round SlimLED (fixture only), 9W, 3000°K, white. Requires SLM-DVR-9W.	771250975997	12	48
SLM4F-9W40K-BK	4" Round SlimLED (fixture only), 9W, 4000°K, black. Requires SLM-DVR-9W.	771250010247	12	48
SLM4F-9W40K-BN	4" Round SlimLED (fixture only), 9W, 4000°K, brushed nickel. Requires SLM-DVR-9W.	771250976024	12	48
SLM4F-9W40K-WH	4" Round SlimLED (fixture only), 9W, 4000°K, white. Requires SLM-DVR-9W.	771250976000	12	48
<b>9W Drivers only</b>				
SLM-DVR-9W	9W LED driver, or use with 4" SlimLED series.	771250975973	12	48
<b>6" Round (Fixture only), 12W, 700 Lumens</b>				
SLM6F-12W30K-BK	6" Round SlimLED (fixture only), 12W, 3000°K, black. Requires SLM-DVR-12W.	771250010292	12	24
SLM6F-12W30K-BN	6" Round SlimLED (fixture only), 12W, 3000°K, brushed nickel. Requires SLM-DVR-12W.	771250976055	12	24
SLM6F-12W30K-WH	6" Round SlimLED (fixture only), 12W, 3000°K, white. Requires SLM-DVR-12W.	771250976031	12	24
SLM6F-12W40K-BK	6" Round SlimLED (fixture only), 12W, 4000°K, black. Requires SLM-DVR-12W.	771250010308	12	24
SLM6F-12W40K-BN	6" Round SlimLED (fixture only), 12W, 4000°K, brushed nickel. Requires SLM-DVR-12W.	771250976062	12	24
SLM6F-12W40K-WH	6" Round SlimLED (fixture only), 12W, 4000°K, white. Requires SLM-DVR-12W.	771250976048	12	24
<b>12W Drivers only</b>				
SLM-DVR-12W	12W LED driver, for use with 6" SlimLED series.	771250975980	12	48
<b>Accessories</b>				
SLM-60-FC*	60" Flexible connector, for use with SlimLED fixtures.	771250976079	12	48
P-4020*	4" Pre-mounting plate, for use with SLM4 series.	771250977397	12	48
P-4020S*	4" Pre-mounting plate, for use with SLM4S series.	771250977410	12	48
P-6020*	6" Pre-mounting plate, for use with SLM6 series.	771250976093	12	48
P-6020S*	6" Pre-mounting plate, for use with SLM6S series.	771250977403	12	48
VBE-1*	Vapor barrier extender for 4" & 6" fixtures. For use in New Construction applications.	771250904942		50
VBE-2*	Vapor barrier extender for 4" fixtures. For use in Remodel applications.	771250971388		50
VBE-3*	Vapor barrier extender for 6" fixtures. For use in Remodel applications.	771250976086	12	48

\* Not included in Lifetime Warranty program

