

# SPECIFICATION

# NEXLEDS®

NEXLEDS LTD



IP65




**3WATT Choosable**  
Flip Switch to change WATT

75W 60W 45W

120W 96W 72W



**3CCT Choosable**  
Flip Switch to change CCT



3000K 4000K 5000K



## LED Wall Pack

**NX-OWWP3-75W-DV-3C-3W**

**NX-OWWP3-120W-DV-3C-3W**

### Specification

PRODUCT NAME :	LED Wall Pack	
MODEL NO. :	NX-OWWP3-75W-DV-3C-3W	NX-OWWP3-120W-DV-3C-3W
WATTAGE:	75W-60W-45W Changeable	120W-96W-72W Changeable
SPECIFICATION :	AC120-347V; 50/60Hz; 700mA	AC120-347V; 50/60Hz; 1100mA
WORKING TEMP :	-40-45(°C)	
POWER FACTOR :	>0.9	
CRI(RA) :	>70	
COLOR :	Dark Bronze	
MATERIAL :	Die-casting Aluminum	
LIGHT SOURCE :	Lumileds2835	
LUMEN :	130 lm / W	
LIFE TIME :	50000 hrs	
BEAM ANGLE :	90°	
PRODUCT SIZE :	14x8.9x4.76 inch	
IP :	IP65	
APPLICATION :	General outdoor security lighting, pathways, loading docks, perimeters and etc.	
WARRANTY :	5 years	
STANDARD :	UL, c UL, DLC, FCC	
COLOR TEMP :	3000K- 4000K-5000K changeable	



www.nexleds.ca



Email: sales@nexleds.ca

# NEXLEDS®

NEXLEDS LTD


## SPECIFICATION

**NEXLEDS**<sup>®</sup>  
NEXLEDS LTD

### Feature:

- Ultra-slim, die-cast aluminum housing with (3) available 1/2" threaded conduit hubs: (1) on back and (2) on 2 sides, (1) on bottom
- Powered by 0–10V dimming LED drivers
- Color Select Technology: Adjustable CCT (3000K, 4000K, or 5000K)
- Borosilicate glass lens diffuses light source and provides uniform distribution
- Covers footprint of mid-size & large-size HID wallpacks
- Ambient operating temperature: -40°C/-40°F to 45°C/113°F
- UL listed for wet locations, IP65
- Power Factor: >0.9
- THD: <20%
- Meets FCC Part 15, Part B, Class A standards for conducted and radiated emissions

### Product Dimension

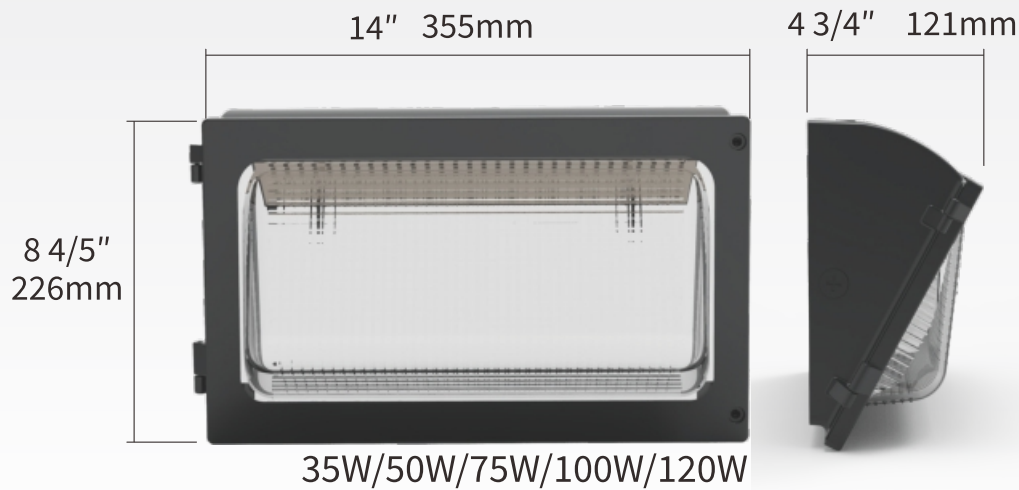

### Installation Reference:



[www.nexleds.ca](http://www.nexleds.ca)



Email: [sales@nexleds.ca](mailto:sales@nexleds.ca)

**NEXLEDS**<sup>®</sup>

NEXLEDS LTD