



Key Features & Benefits

- ▶ Easy Installation
- ▶ Energy Star Certified
- ▶ Certified Air-Tight per ASTM E283-04
- ▶ Meets CEC Standards
- ▶ CRI 80/90
- ▶ Voltage: 120V
- ▶ Retrofit 4"/5-6" standard recess can
- ▶ Dimmable/Instant On
- ▶ 35,000/ 50,000 hours rated average life
- ▶ Built-in power connector with adjustable torsion clips

NEW

Color Changing Trim
*Available as optional



GU24

*Available as optional



Applications



- ▶ Recessed Can Downlight
- ▶ Residential Lighting
- ▶ Retail Store Lighting
- ▶ School & University
- ▶ Restaurant Lighting

**CRI
80**

**CRI
90**

Adjustable Sizing

5"-6" adjustable torsion clips to better fit the distance needed for installation.



High CRI with LEDs




Color Rendering Index (CRI) describes how an object appears to the human eye based on ideal or natural light source. The CRI is an index, a measure, that tells something about how colors are represented by light coming from a certain light bulb, compared to how the colors are rendered with the light coming from a reference illuminant.

The CRI reports a unit less value, that can differ between 0 and 100. The value 100 means that there is no difference in color rendition between the light of the observed light bulb and the light of the reference illuminant., lighting with a CRI of 85 to 90 is typically "excellent" at rendering colors of objects while CRI90 or greater are "superior".

LED DOWNLIGHT RETROFIT CRI80/90


Dimensions

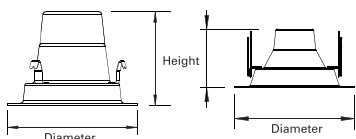	LED	Diameter (in/mm)	Height (in/mm)	Weight (lbs)
	4-inch	5.00" / 129	3.50" / 88	0.60
	5/6-inch	7.50" / 190	3.80" / 98	0.90

*Both CRI 80 and CRI 90 are identical in size


Package

4"



Package
(Inner/ Master)
10/20

**5"
6"**



Package
(Master)
10

Product Data

Item Code	Description	Wattage	CCT	Lumen Output	Diameter	Equivalent Wattage	DIM	Air Tight	RoHS COMPLIANT	ENERGY STAR
CRI 80										
7092	LED4RL-56L30K	9W	3000K	560	4"	50W	●	●	●	●
7172	LED4RL-56L40K	9W	4000K	560	4"	50W	●	●	●	●
7173	LED4RL-56L50K	9W	5000K	560	4"	50W	●	●	●	●
7562	LED4RL-65L830	9W	3000K	650	4"	60W	●	●	●	●
7566	LED4RL-65L840	9W	4000K	650	4"	60W	●	●	●	●
7567	LED4RL-65L850	9W	5000K	650	4"	60W	●	●	●	●
7563	LED6RL-98L830	13W	3000K	980	5/6"	90W	●	●	●	●
7568	LED6RL-98L840	13W	4000K	980	5/6"	90W	●	●	●	●
7569	LED6RL-98L850	13W	5000K	980	5/6"	90W	●	●	●	●
CRI 90										
7177	LED4RL-55L930	9W	3000K	555	4"	50W	●	●	●	●

Product Data

7617	ADP-RLGU24-N	GU24 Base
7645	RT-4RL-BK	Recessed Trim - 4" recessed light-Black
7646	RT-4RL-NI	Recessed Trim - 4" recessed light-Nickel
7647	RT-4RL-BZ	Recessed Trim - 4" recessed light-Bronze
7648	RT-6RL-BK	Recessed Trim - 6" recessed light-Black
7649	RT-6RL-NI	Recessed Trim - 6" recessed light-Nickel
7650	RT-6RL-BZ	Recessed Trim - 6" recessed light-Bronze



Visit www.mynaturalLED.com to download the installation guide or contact your sales rep for more information.