

Date:	Project Name:	
Туре:	Part Number:	









ZETA SERIES

LED MULTI-DOWNLIGHT AL

DESCRIPTION

RENO Lighting's Aluminium Reflector Multifunctional Downlight is a commercial grade downlight fixture. This Energy Star qualified downlight with integrated driver, designed as an energy efficient lighting solution for the Commercial's popular 4"/6"/8"/10" recessed downlight fixtures. Features Dual Voltage 120-347V and easy installation with adjustable wattages and colour temperature.

FEATURES

- Dual Voltage 120-347V
- Multi CCT & Wattage
- Suitable for Type-IC on models: 4", 6", 8" & 10"
- External spring arms install to mounting surface without the need for a traditional recessed can
- Energy-Star, JA8 compliant
- Rated Lifetime L70(hrs): >50,000
- 0-10V Dimming
- Damp location
- Operating temperature: -4°F to 113°F (-20°C to 45°C)
- 5 year warranty

APPLICATIONS



Gallery



Commercial Kitchen



Office Lighting





























Date:	Project Name:
Туре:	Part Number:

SPECIFICATION

ORDER#	MODEL#	WATTS	SIZE	VOLTAGE (V)	LUMENS	BEAM ANGLE	CCT (K)
R36221	RENO-DL4-MW-DV-MCCT-AL	6/9/13W	4"	120-347V	600/900/1300 lm	89°	27/30/35/40/50K
R36222	RENO-DL6-MW-DV-MCCT-AL	13/19/27W	6"	120-347V	1300/1900/2700 lm	97°	27/30/35/40/50K
R36223	RENO-DL8-MW-DV-MCCT-AL	18/27/36W	8"	120-347V	1800/2700/3600 lm	97°	27/30/35/40/50K
R36224	RENO-DL10-MW-DV-MCCT-AL	20/30/40W	10"	120-347V	2000/3000/4000 lm	97°	27/30/35/40/50K

DIMENSIONS



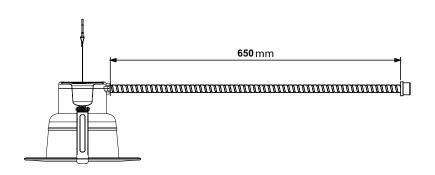

MODEL	А	В	С	Min. CUT OUT	Max CUT OUT
4"	4.13"	4.55"	5.57"	4.33"	5.51"
6"	5.36"	5.68"	5.62"	5.91"	7.48"
8"	6.54"	6.92"	6.29"	7.48"	9.45"
10"	7.45"	7.52"	6.76"	8.27"	10.24"

