



Date:	Project Name:
Type:	Part Number:



BRILLIANCE SERIES

LED SLIM POTLIGHT

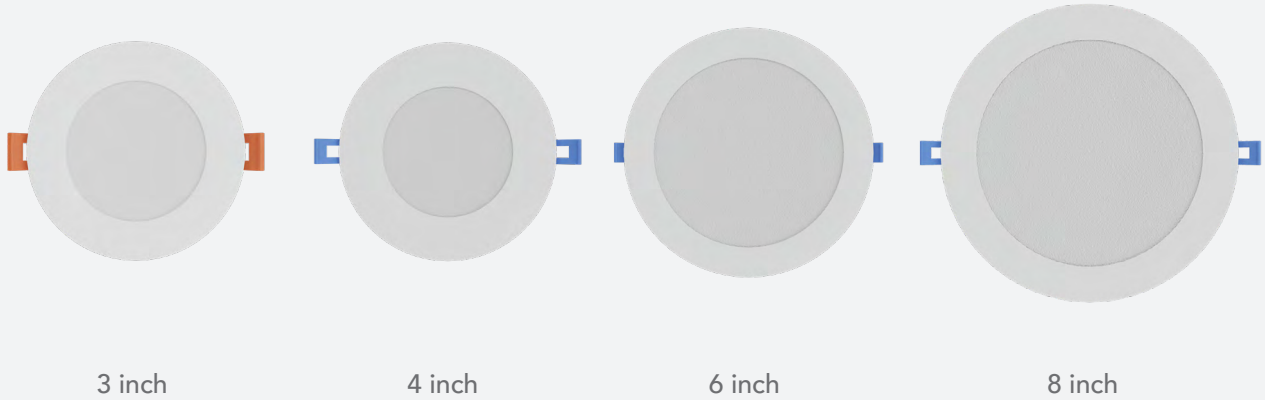



DESCRIPTION

Brighten your living room, kitchen, or bathroom with the Brilliance Series recessed pot lights. With its multi-CCT feature, you can easily adjust the lighting ambiance to suit your preference. The round design and white finish blend seamlessly with any decor, providing a modern and clean aesthetic. Easy installation with high-quality mounting spring, quick connectors, and included junction box. The premium aluminum body of this LED slim panel ensures superior durability and aesthetics compared to plastic options. Say goodbye to yellowing with age.

FEATURES

- IC-rated and Air-Tight ready and may be in direct contact with insulation
- Can be installed in shallow plenum spaces
- Multi CCT
- Flicker-free 120V forward-phase Triac dimming down to 10%
- 277-347V Driver Available
- FT4-Rated Cable
- Energy-Star, JA8 compliant
- Rated Lifetime L70(hrs): >50,000
- CRI 80
- 5 year warranty

APPLICATIONS

-  Gallery
-  Commercial Kitchen
-  Office Lighting
-  Residential



Date:	Project Name:
Type:	Part Number:

SPECIFICATION


ORDER#	MODEL#	WATTS	SIZE	VOLTAGE (V)	LUMENS	CCT (K)	BEAM ANGLE
R36008	RENO-3-S6W-345KWH	6W	3"	120V	400lm	30/40/50K	108°
R36013	RENO-4-S12W-MCCT-WH	12W	4"	120V	800lm	30/40/50K	108°
R36010	RENO-6-S12W-345KWH	12W	6"	120V	800lm	30/40/50K	108°
R36012	RENO-8-S22W-345KWH	22W	8"	120V	1640lm	30/40/50K	108°

ACCESSORIES

ORDER#	MODEL#	DESCRIPTION
R39105	LED-HBL015-347V-D	AC277V-347V Driver for slim panel light 4" & 6" non dimmable
R39106	LED-HBL033-347V-D	AC277V-347V Driver for slim panel light 8" non dimmable
R39101	RENO-4-GR	4" Goof Ring outside Ø 5 3/4"
R39102	RENO-6-GR	6" Goof Ring outside Ø 8"
R39103	RENO-8-GR	8" Goof Ring Ø 9 1/2"

Date:	Project Name:
Type:	Part Number:

DIMENSIONS

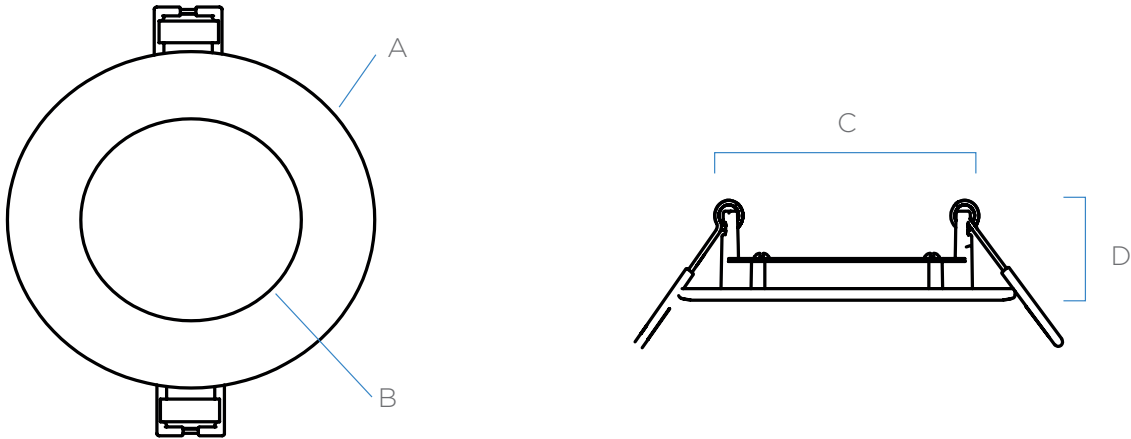

MODEL	A	B	C	D
3"	Ø 95mm (Ø 3.75")	Ø 57mm (Ø 2.25")	Ø 76mm (Ø 3")	Ø 25mm (Ø 1")
4"	Ø 127mm (Ø 5")	Ø 76mm (Ø 3")	Ø 101mm (Ø 4")	Ø 25mm (Ø 1")
6"	Ø 177mm (Ø 7")	Ø 127mm (Ø 5")	Ø 158mm (Ø 6.25")	Ø 25mm (Ø 1")
8"	Ø 229mm (Ø 9")	Ø 159mm (Ø 6.25")	Ø 210mm (Ø 8.25")	Ø 25mm (Ø 1")