

Date:	Project Name:
Type:	Part Number:



T8 TYPE A



FEATURES

- Direct plug-in & Safe Installation
- No UV or IR radiation
- High luminous efficiency
- Compatible with instant & programmed start ballast
- Improved Lamp Durability with Shatterproof Coated Glass
- High luminous efficiency
- NSF Listed: NSF/ANSI Standard 2 - Food Equipment
- Operating temperature: -4°F to +113°F (-20°C to +45°C)
- Rated Lifetime L70(hrs): >50,000
- 5 year warranty

APPLICATIONS

- Commercial applications
- Food Service Equipment
- Office Lighting
- Residential




Date:	Project Name:
Type:	Part Number:

SPECIFICATION

ORDER#	MODEL#	WATTS	SIZE	VOLTAGE (V)	LUMENS	BASE TYPE	BEAM ANGLE	CCT (K)
R41027	RENO-LEDT8BC-8W-MCCT-24G	8W	2FT	BF	1325 lm	G13	330°	3500K
					1350 lm			4000K
					1350 lm			5000K
R41028	RENO-LEDT8BC-11W-MCCT-36G	11W	3FT	BF	1675 lm	G13	330°	3500K
					1700 lm			4000K
					1700 lm			5000K

DIMENSIONS

2FT

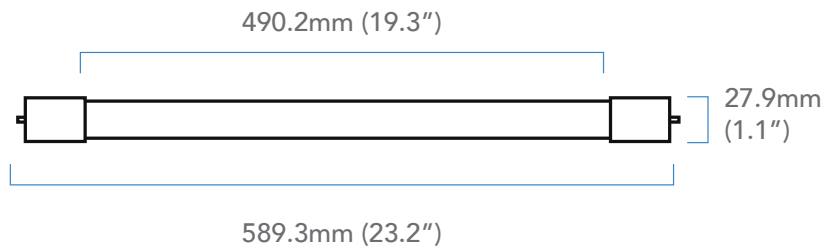

3FT

