

Date:	Project Name:
Type:	Part Number:


**BL-R-MV**

**BL-RL-MV**

**BL-RD-MV**

**BL-RL-S-MV**


# SYLO SERIES

## BOLLARD FIXTURES






### DESCRIPTION

The RENO Lighting's Sylo series Bollard provides a sleek design and provides a low to the ground illumination to light up walkways and darkened paths. This versatile fixture can be customized by colour temperature and wattage. Great for adding personality to any building's exterior.

### FEATURES

- Corrosion resistant aluminum exterior
- Bronze Housing
- Custom colours available
- Multi CCT & Wattage
- Dual Voltage 120-347V
- IP65 Rated
- Operating temperature: -40°F to +113°F (-40°C to +45°C)
- Comes integrated with a photocell switch. Optional on /off
- Rated Lifetime L70(hrs): >54,000
- 5 year warranty

### APPLICATIONS

-  Entryway Lighting
-  Pathway Lighting
-  Walkways




Date:	Project Name:
Type:	Part Number:

## SPECIFICATION

ORDER#	MODEL#	WATTS	VOLTAGE (V)	CCT (K)	LUMENS	EFFICACY	CRI
R56010	RENO-BL-R-MV-DV-MCCT-42	14/19/24W	120-347V	30/40/50K	1960/2660/ 3360 lm	140 lm/W	>70
R56011	RENO-BL-RL-MV-DV-MCCT-42	14/19/24W	120-347V	30/40/50K	1050/1425/ 1800 lm	75 lm/W	>70
R56012	RENO-BL-RD-MV-DV-MCCT-42	14/19/24W	120-347V	30/40/50K	1960/2660/ 3360 lm	140 lm/W	>70
R56013	RENO-BL-S-MV-DV-MCCT-42	14/19/24W	120-347V	30/40/50K	1820/2470/ 3100 lm	130 lm/W	>70

## ACCESSORIES

ORDER#	MODEL#	DESCRIPTION
R59012	RENO-BL-SHIELD	180° Spill Shield



**RENO-BL-SHIELD**


### 180 DEGREE SPILL SHIELD

This spill shield can be added to the bollard to provide a 180 degree of light coverage.



Date:	Project Name:
Type:	Part Number:

## DIMENSIONS

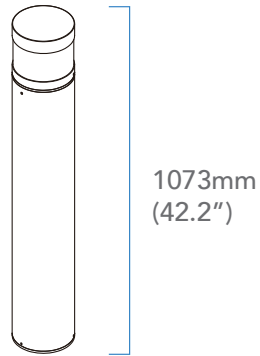

1073mm  
(42.2")

Ø160mm  
(Ø6.3")

**BL-R-MV**



1048mm  
(41.3")

Ø160mm  
(Ø6.3")


**BL-RL-MV**



1073mm  
(42.2")

Ø160mm  
(Ø6.3")

**BL-RD-MV**

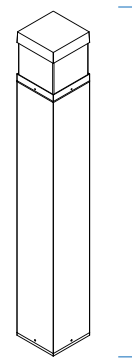

1048mm  
(41.3")

Ø160mm  
(Ø6.3")

**BL-RL-S-MV**