RENO LIGHTING

Date:	Project Name:
Type:	Part Number:

EMERGENCY SERIES

LED EMERGENCY LIGHT

DESCRIPTION

The Emergency Series is DLC Premium listed and ETL for wet locations with a rating of IP65. It is encased in a sturdy, all steel housing. It comes standard with a mounting canopy, three pictograms, one backplate and all mounting hardware. An external LED status indicator and test switch is standard. Powered with long life LED chips, they are the perfect choice for both new and retrofit projects.

FEATURES

- Damp location
- Steel housing & PC Material
- Thermoplastic ABS heads
- Nickel Cadmium Battery
- Easy Installation & Maintenance
- 2 hrs emergency time
- Test switch and charge Indicator light
- Voltage 120-347V
- 7 year warranty

APPLICATIONS

- Commercial building
- Hospitals
- Retails
- Schools

Intertek | DUAL VOLTAGE 120-347V | 7 YR WARRANTY

RENO LIGHTING

Date:	Project Name:
Type:	Part Number:

SPECIFICATION

ORDER#	MODEL#	WATTS	VOLTAGE (V)	CHARGE TIME	DISCHARGE TIME	MATERIAL	BATTERY TYPE
R61004	RENO-SRMS-U	2W	120-347V	8 Hours	>2 hours	Powder Coated Steel	Sealed Nickel-Cadmium
R61005	RENO-SRMC-U	2x5W (940lm)	120-347V	24 Hours	>2 hours	Powder Coated Steel	Sealed Nickel-Cadmium

CONFIGURATIONS

Configuration 1

ES2-BU2SC30B-3 + X3

ES2-RH1PC2-6

Configuration 2



ES2-BU2SC30B-3 + X1 +  X1

ES2-RH1PC2-6 ES2-RH1PC4-6

PICTOGRAMS INCLUDED

No Indicator

Left Indicator

Right Indicator



RENO™ LIGHTING

Date:	Project Name:
Type:	Part Number:

DIMENSIONS

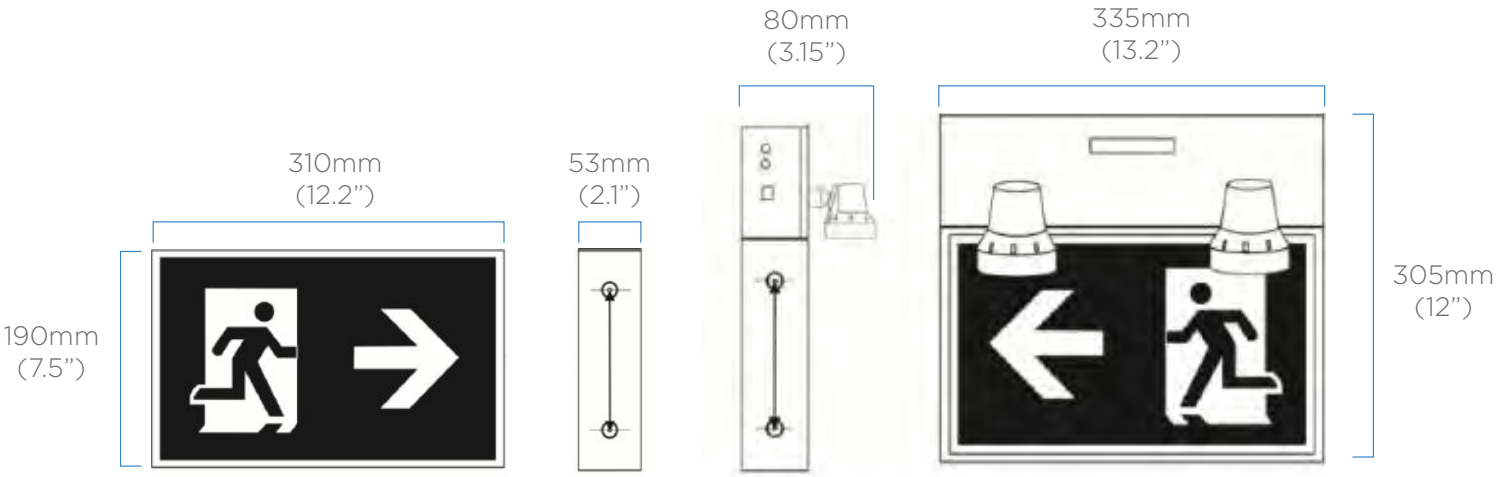

MOUNTING OPTIONS

Flag Mount



Wall Mount

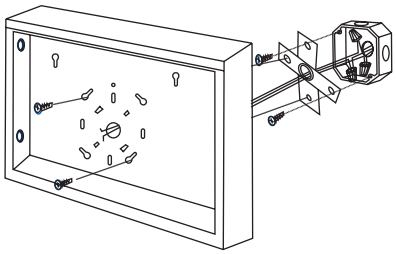
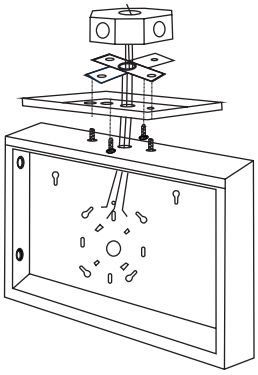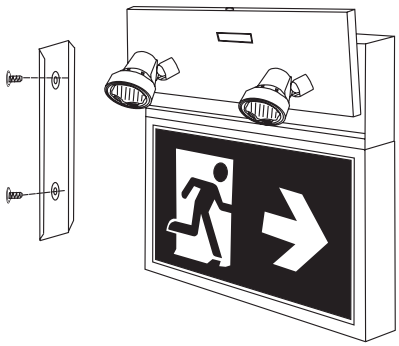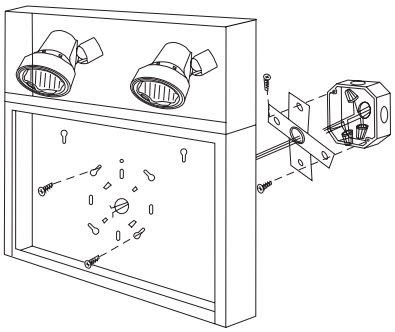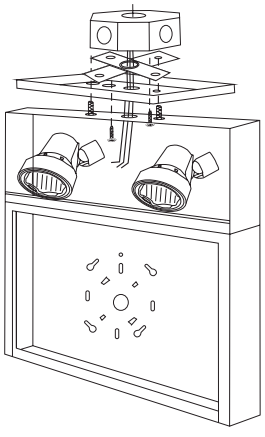
Ceiling Mount