


Wallpack Light Instruction

FL-0255 Series

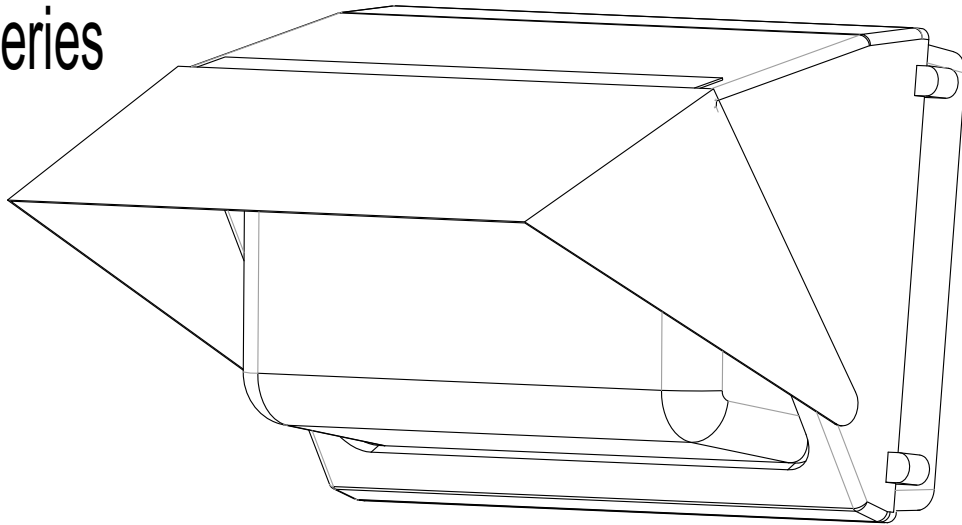

Warning

To avoid the accident of damage, falling, electric shock or fire, please do not reform the lamp or replace the accessories and confirm with us if you need to change the mounting methods.

Please authorize the installation to qualified installation personnel and obey to the instruction manual. Any unsuitable installation will easily cause the accident of falling, electric shock and fire etc.

Please cut off the power before installation or any maintenance of the lamp.

Please cut off the power when it smokes or smells awfully since the accident of fire or electric shock may occur. Ask the qualified personnel for maintenance.

Please do not dismantle the lamp by yourself since the accident may incur.

Please do not touch the driver when the lamp works.

PRODUCT DESCRIPTION

CONSTRUCION & MATERIALS

Housing is all aluminum construction

Terminal block for power input suitable for #2 - #10 AWG wire

Luminaire sides are rugged die cast aluminum with integral, weathertight LED driver compartments and high performance heat sinks

Surface-mount directly to a vertical or horizontal surface with included mount bracket


CERTIFICATIONS AND QUALIFICATIONS

CETLus Listed

Suitable for wet location

IP65 rated

DIMENSION

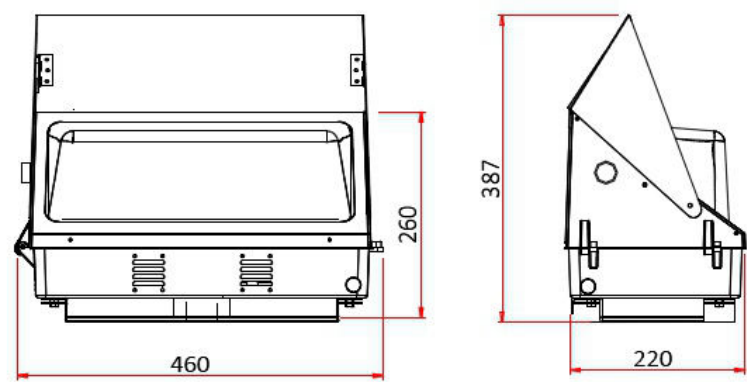

PRODUCT FEATURES

SPLENDID standard LED Wall Packs with new optics increase light output and efficacy to reduce shadows and create safe, brightly-lit outdoor environments in parking garages, entrances, public areas, schools, hospitals, hotels, and outdoor walkways nationwide.

PERFORMANCE DATE

Technical Specifications	FL-0255-A-C	FL-0255-B-C	FL-0255-C-C	FL-0255-D-C	FL-0255-E-C
LED Luminous Efficiency	70 lm/W				
Lamp Flux	2800 lm	3500 lm	4200 lm	5600 lm	6300 lm
Color Temperature	5000k				
Rated Voltage	120-277VAC / 200V-347V				
Frequency Range	50/60Hz				
Rated Power	40W	50W	60W	80W	90W
Power Efficiency	>90%				
Power Factor	>0.95				
Net Weight	4.6kg				
Color Rendering Index	Ra> 70				
Working Environment	-25 °C - 60°C / -13 °F - 140°F				
Led Life Time	>50000 Hrs				
Material	Aluminum Alloy & Glass				
Figuration Size	46 x38.7 x 22 cm				
IP Rating	IP67				

PHOTOMETRY

