




### Features

- IC Rated
- Airtight
- Dimmable
- Work with most of existing dimmer in market
- Five years limited warranty
- Not for emergency lighting
- Suitable for damp locations







360° Rotation

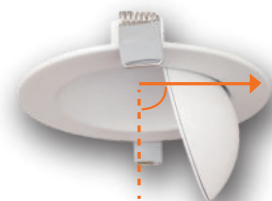


90° Tilt

	3WAY CCT Adjustable			5WAY CCT Adjustable		
Mode No.	DL4-023-8WH8345	DL4-023-8BK8345	DL4-023-8BN8345	DL4-148-9WH5CS	DL4-148-9BK5CS	DL4-148-9BN5CS
Dimension	Ø4.7"x1.1"	Ø4.7"x1.1"	Ø4.7"x1.1"	Ø4.7"x1.1"	Ø4.7"x1.1"	Ø4.7"x1.1"
Fixture Color	White	Black	Brushed nickel	White	Black	Brushed nickel
Watts	8W	8W	8W	9W	9W	9W
Volts	120V	120V	120V	120V	120V	120V
CRI	80	80	80	80	80	80
Color Temperature	30K,40K,50K ADJ	30K,40K,50K ADJ	30K,40K,50K ADJ	27K,30K,35K,40K,50K ADJ	27K,30K,35K,40K,50K ADJ	27K,30K,35K,40K,50K ADJ
Lumens	700	700	700	750	750	750
Beam Angle	40°	40°	40°	40°	40°	40°
Operating Temperature	(-4°F) - (104°F)	(-4°F) - (104°F)	(-4°F) - (104°F)	(-4°F) - (104°F)	(-4°F) - (104°F)	(-4°F) - (104°F)
Rated Life	50000H	50000H	50000H	50000H	50000H	50000H
Weight(g)	440	440	440	440	440	440
Warranty	5 years	5 years	5 years	5 years	5 years	5 years



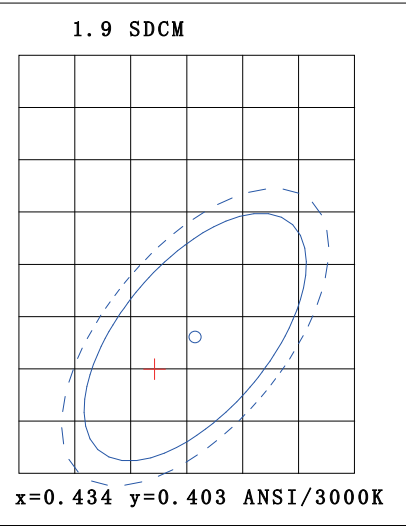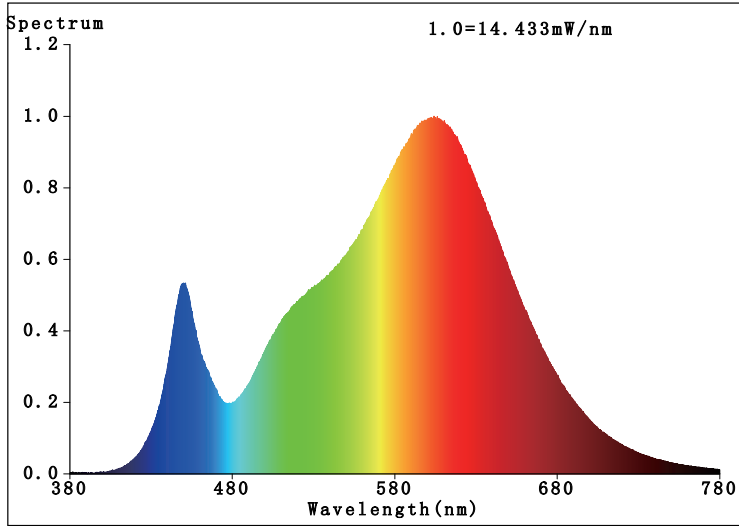

### LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

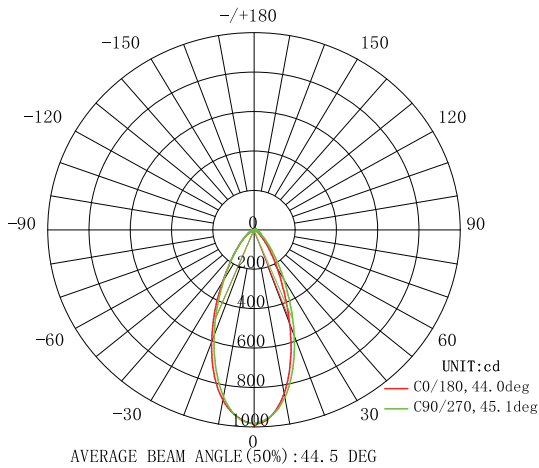

### AAI Figure

