


Project : _____
 Type : _____
 Drawn by : _____
 Catalogue No. : _____
 Date : _____

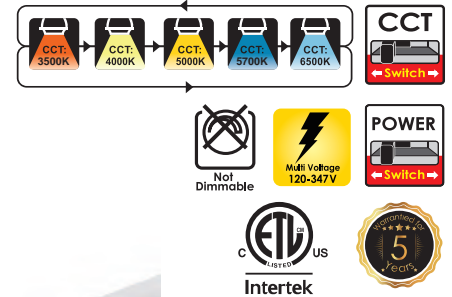


Specifications

Model No.		□ JL-ALT8-8FTAB-M48W-CCT-VH
General	Size	8'
	Watts	48/42/36/30/24W Adj
	Lumen	5500LM
	Base	Fa8 or R17D
	CCT	3500/4000/5000/5700/6500K Adj
	Volts	AC120-347V
	CRI	>80
	Beam Angel	120°
	Hours Rated	50,000 hours
	Max Compartment Size	Length: 94in.Width: 1in
	Ballasting Requirements	Ballast Bypass
Electrical	Operating Frequency	50/60 Hz
	Power Factor	>0.9
	Wiring	Double-ended 2 pins connected
	Operating Temperature	-20°C (-4°F) to 45°C (113°F)
Physical	Cover	Frosted
	Cover Color	Milky
Additional Information	Net weight (Kg)	0.45
	Additional Info	Multi-Voltage
	Warranty	5 years
Compliance	Location Rating	Damp
	DLC Approved	Approved
	DLC ID	To be provided


Features & Specifications

Construction	<ul style="list-style-type: none"> • Shatterproof design, lower the breakage rate also safe for shipping • Double-ended 2 pins connected
Mounting	<ul style="list-style-type: none"> • Clip included for lock the tube in the middle without bending issue
Performance Data	<ul style="list-style-type: none"> • Available in 3500K/4000K/5000K/5700K/6500K,48/42/36/30/24W selectable color temperature and selectable watt • 80+ CRI • Electrical ratings:120-347Vac • Estimated life of 50,000 hours • No dimming • Operating temperature:-20°C(-4°F) to 45°C(113°F)
Compliances	<ul style="list-style-type: none"> • ETL certified • DLC 5.1 Standard

Dimensions & Weights

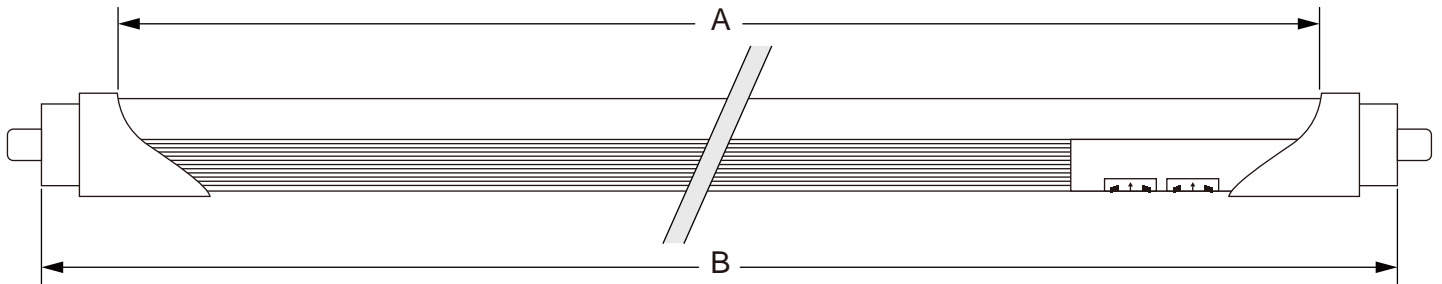

Model No.	JL-ALT8-8FTAB-M48W-CCT-VH
Length A in.(mm)	91.08" (2314)
Length B in.(mm)	92.78" (2357)
Length C in.(mm)	1.13" (28.8)
Length D in.(mm)	1.29" (32.8)
Net weight kg.(lbs)	0.45" (0.99)



Product Details




- Fa8 end cap and R17d end cap convertible, meets different requirement



- 5CCT and 5 watt
48/42/36/30/24W Adj
3500/4000/5000/5700/6500K Adj




- Anti-Rotation Clip in the middle, without rotation and bending issue

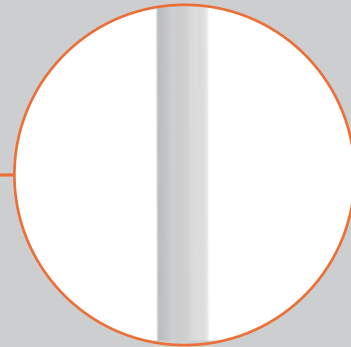

- Frosted Cover

Accessories

Order Code	Compatible with	Order Option
FA8	JL-ALT8-8FTAB-M48W-CCT-VH	Included
R17D	JL-ALT8-8FTAB-M48W-CCT-VH	Order seperately
Anti-Rotation Clip	JL-ALT8-8FTAB-M48W-CCT-VH	Included

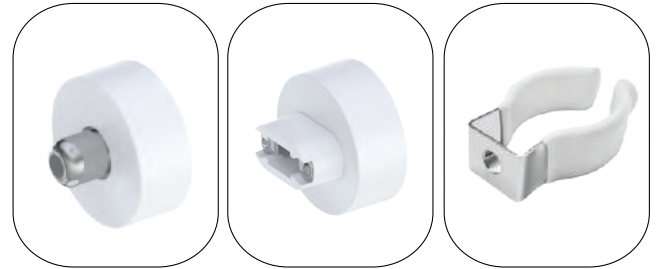


FA8

R17D

Anti-Rotation Clip





Wiring Diagram



TYPE A+B(Double-ends direct power WO ballast)
Voltage Input: AC120-347V 50/60Hz

Connected to the power supply in double-ended mode.

PLUG & PLAY

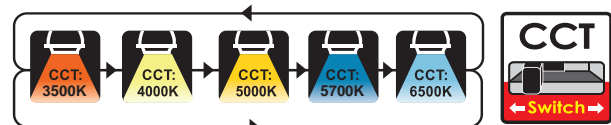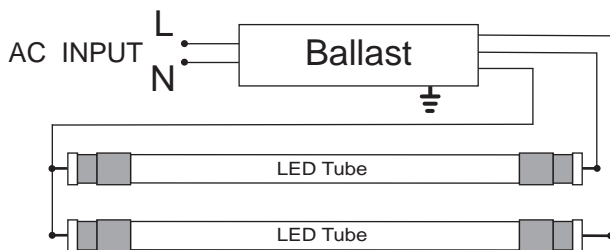

Data is based upon tests performed in a controlled environment. Actual performance can vary depending on operating conditions. All products are subject to change or may be discontinued any time without notice. Please contact your Votatec customer service representative to confirm inventory levels at time of order

